


LI4278 LINEAR IMAGER

PAIRING THE LI4278 TO ANDROID



LI4278



Android Tablet

FOLLOW THESE 6 EASY STEPS:

- 1 The following barcodes must be scanned before attempting to pair the scanner to the Android device.



Set Factory Defaults



BT HID Slave




Variable Pin Code


LI4278 LINEAR IMAGER

PAIRING THE LI4278 TO ANDROID

- 2** Under Settings, select **Wireless Networks**.
Turn **Bluetooth on**.

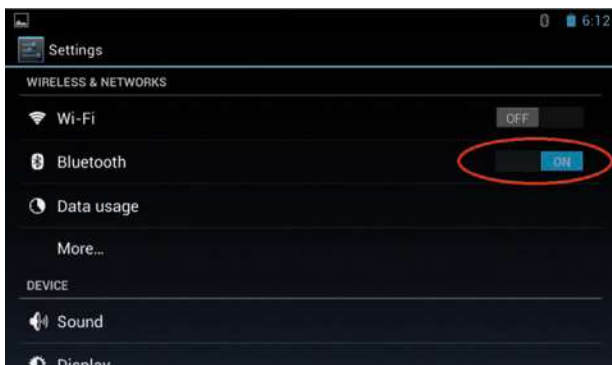


- 3** Select **Search for Devices**. From **Available Devices**, select the **LI4278**. The serial number of the scanner assists in identifying the correct device.

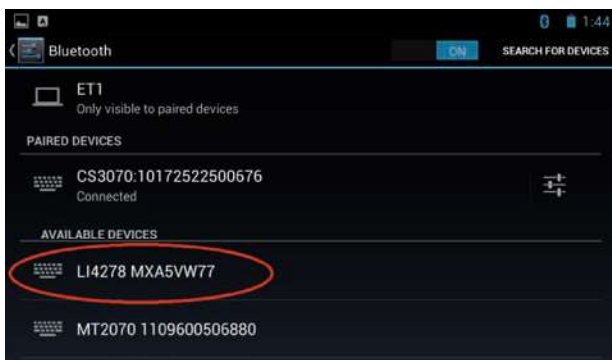

LI4278 LINEAR IMAGER

PAIRING THE LI4278 TO ANDROID

- 4** A pin code is issued. Scan the pin code followed by **End of Message** using the **Alpha-Numeric Keyboard** barcodes. When the pin is complete the scanner emits a short low beep followed by a short high beep indicating the successful connection.

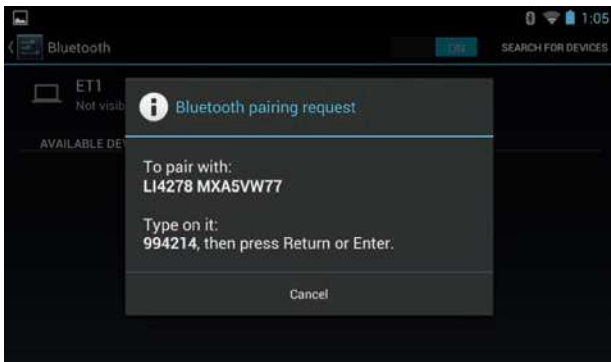


LI4278 LINEAR IMAGER

PAIRING THE LI4278 TO ANDROID



5 The device is now connected and is ready to scan when it is listed under Paired Devices.

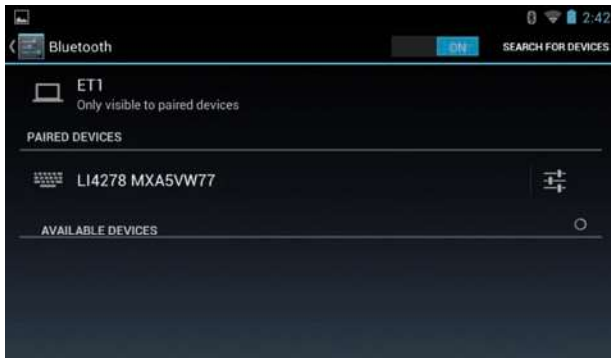

6 Test the scanner in any application capable of accepting keyboard input.

